

Prozone Water Products Commercial Systems

PZ2-6 Commercial Pools

The PZ2-6 for pools up to 75,000 gal (283,900 liters) is a compress or driven ozone system which can inject ozone under almost any hydraulic condition including pools with in-floor cleaners. The system is built with commercial grade compressors, solid state power supplies, our advanced Hybrid ozone generator and muffling to ensure quiet operation.



Upgrade Optional Skid Mount Includes:

- Full Turnkey Water In
Water Out Installation
- Water Circulation Pump
- Counter Flow Contacting
- Static Mixer
- Degas Column

Additional Upgrade Options:

- ORP/Ph Monitoring
- Ozone Destruct
- Ozone Monitoring
- Below Water Solenoid Kit



T-O₃ NATURAL TECHNOLOGY

Reduces Chemical Usage, Improves Sanitation, Eliminates Odors, Produces Crystal Clear Water

No recurring maintenance or special skills are required. All PZ2 residential and commercial systems carry a two-year warranty; Contact a Prozone engineer for further engineering options on the PZ2 Series.

Electrical System Options

- 110/220 VAC, 60 hz
- 220/240 VAC, 60 hz
- 230 VAC, 50 hz
- Universal Solid State Inverter Ballast: 90 VAC to 270 VAC

Installation Kit to Met NSF Std. 50 Available


- Kit includes NEMA housing, contacting system, and degassing column; boost pump optional

Specifications

- Arc Life (Nominal): 20,000 Hours
- Compressor Life: (Nominal): 40,000 Hours
- Operating Temperature: -25° F. to +140° F.
- Storage Temperature: -60° F. to +160° F.



Front of PZ2-6 on Optional Skid Mount Upgrade

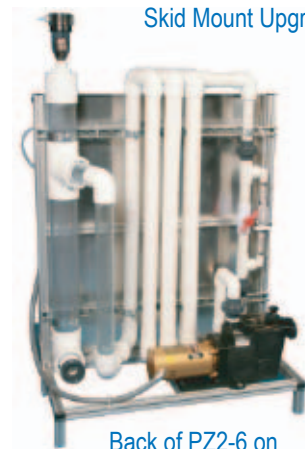

Back of PZ2-6 on Optional Skid Mount Upgrade



Environmentally Friendly



Commercial Pool Sizing	
Nominal	1500,000
Loaded	75,000
Dimensions of PZ2-6	
24" X 7" X 30"	
Weight without skid	
69 lbs	
Dimensions of PZ2-6 with Skid Mounts	
42" X 37" X 60"	